ATTENTION: CHANGE SETTING MENU

- The vehicle must be turned on
- Turn on the hazard lights
- Press the brake pedal

Setting the Fader:

- Use "Source" to set the fader in central position
- Use "Volume +" (press repeatedly) to move to rearside
- Press "Volume -" (press repeatedly) to move to front side

Setting the languages:

-Press "Presetup" to change the languages

Time setting (if supported by the vehicle):

- -Press "Seek up" to increase the hours
- -Press "Seek down" to decrease the hours

How to exit the change setting menu:

- Turn off the hazard lights
- Release the brake pedal

Please note:

The compass function will be lost.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages. 11/2017 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints. R2 Steering wheel control interface installation kit for:

JEEP

Model:

Wrangler - "Sahara" version

Year:

2017>

Kit content:


SWC CANBUS interface

wiring harness Active Plus interface antenna adapter

radio adapter


red ISO audio adapter

Customer code:

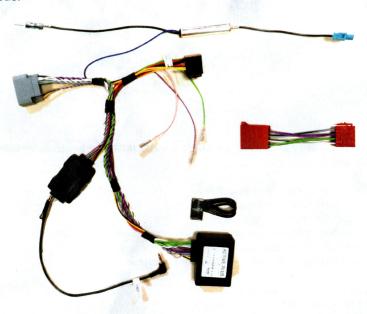

INSTALLATION MANUAL

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages. 11/2017 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

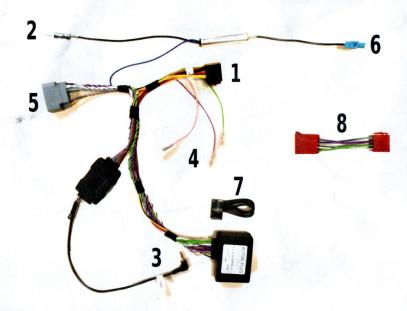

ATTENTION!

In order to prevent ESD damage, the WHEEL REMOTE JACK must be connected before plugging in the connectors on car side.

Connect cables to the radio side as follow:

- 1- to ISO CONNECTOR (black and red housings)
- 2- to RADIO ANTENNA-CONNECTOR
- 3- to WIRED REMOTE SOCKET (NOTE: do not connect to microphone socket)
- 4- to SERVICES (if required); function is marked on the wire: Green: Parking - Pink: Speed - Violet/White: Reverse

Connect cables to the car side as follow:

- 5- to CAR CONNECTORS
- 6- to CAR ANTENNA-CONNECTOR
- 7- to connect only if the car does not have the OEM amplifier (to disconnect the Active Plus interface)
- 8 NOTE: Only necessary for vehicles with 4 speaker wires in the original radio connector







The steering wheel buttons perform the following functions (For CD and USB Mode):

- 1- Voice
- 2- Short press> Accept incoming call Long press (3 secs) > Reject incoming call
- 3- Seek up
- 4- /
- 5- Seek down
- 6- Volume -
- 7- Source
- 8- Volume +

The steering wheel buttons perform the following functions
(For Radio Mode):

- 1- Voice
- 2- Short press> Accept incoming call Long press (3 secs) > Reject incoming call
- 3- Short press> Preset up Long press (3 secs) > Seek +
- 4- Seek +
- 5- Short press> Preset down Long press (3 secs) > Seek -
- 6- Volume -
- 7- Source
- 8- Volume +